

Auxiliary components Threading joint HSGE

HANWHA



Utility

Applicable interfaces: M5 to G1/2 "


Product characteristics

- *All suction cups and fittings with G1/8 "and G1/4" threads can be threaded for connection
- *Can achieve precise adjustment of suction cup position
- *No tools required to fix and adjust



Product structure

- *(1) Vacuum joint
- *(2) Two galvanized self-locking nuts

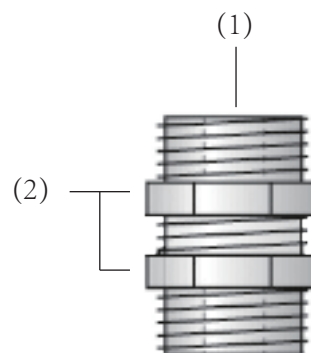

Product advantages

- *No additional installation components required
- *Non corrosive, high stability
- *Easy to adapt to various hose diameters



* HSGE case

Auxiliary components

Threading joint HSGE

Applicable interfaces: M5 to G1/2 “

HANWHA



Utility



HSGE Ordering NO

HSGE	M20X1.5	F01	20
1	2	3	3

1-Series		2- Thread diameter		3-Threaded	
HSGE	Attachment	M	20X1.5	F internal thread	G01-G1/8
			16X1		G02-G1/4
			20X1.5		G03-G3/8
			30X1.5		G04-G1/2
			10X1	M external thread	M5

4-Length	
20	20MM
30	30MM
40	40MM



HSGE Technical Data

Models	Screw thread	Weight
HSGE- M20X1.5-FG02-30	G02-G1/4	63.4G
HSGE- M16X1-FG01-30	G01-G1/8	50.3G
HSGE- M20X1.5-FG03-30	G03-G3/8	63.4G
HSGE- M30X1.5-FG04-40	G04-G1/2	185.1G
HSGE- M10X1-MM5-30	M5	12.3G



Auxiliary components


Threading joint HSGE



Utility

Applicable interfaces: M5 to G1/2 “

HSGE Design Data

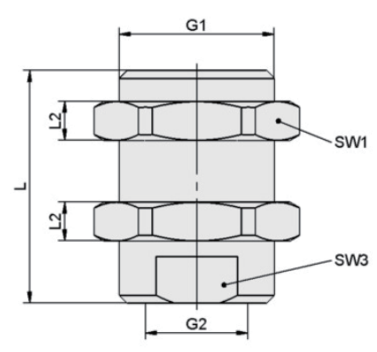

HKB

model	G1	G2	L	L2	SW1	SW3
HSGE- M20X1.5-FG02-30	M14X1.5	FG02-G1/4	30mm	5mm	24mm	17mm
HSGE- M16X1-FG01-30	M16X1	FG01-G1/8	30mm	5mm	22mm	13mm
HSGE- M20X1.5-FG03-30	M14X1.5	FG03-G3/8	30mm	5mm	24mm	19mm
HSGE- M30X1.5-FG04-40	M30X1.5	FG04-G1/2	40mm	8mm	36mm	27mm
HSGE- M10X1-MM5-30	M10X1	MM5	20mm	3mm	14mm	9mm