

One-way valve

HAKH

One side quick change connector

HANWHA



Utility


Product characteristics

- *Prevent gas backflow
- *Vacuum systems are also suitable for use with (-100Pa)
- *Interchangeable connector, small size, easy to install




Product structure

- *As an accessory for vacuum sensors
- *Release sleeve (1)
- *Hexagonal opposite side (2)
- *Connection thread (3)



Product advantages

- *Balance the internal and external pressure of the vacuum gripper, and quickly release the product
- *Energy saving effect when handling non breathable workpieces
- *Any installation position, suitable for narrow spaces

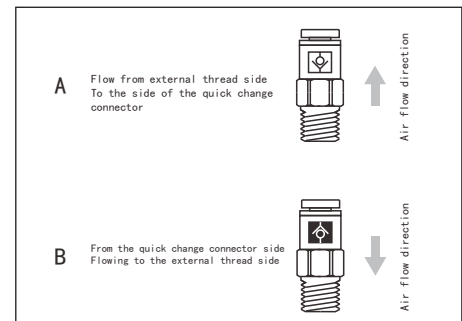

One-way valve

HAKH

One side quick change connector

HANWHA



HAKH Ordering NO

| | | | |
|------|----|----|---|
| HAKH | 08 | 01 | S |
| 1 | 2 | 3 | 4 |


| 1-Series | 2-Connector | 3-Threaded |
|------------|-------------|----------------------------|
| HAKH Valve | 04 Φ4 | M External thread G01-G1/8 |
| | 06 Φ6 | G02-G1/4 |
| | 08 Φ8 | G03-G3/8 |
| | 10 Φ10 | G04-G1/2 |
| | 12 Φ12 | |

| 4-Sealant | |
|-----------|--|
| S | Sealant coated (metric) Thread not coated with sealant Add sealing gasket when needed) |

HAKH Specification

| Models | Use fluid | Operating pressure range | Opening pressure | Temperature | Flexible hose material |
|-------------|-----------|--------------------------|------------------|-------------|---------------------------------|
| HAKH-08-01S | air | -100kpa~1MPa | 0.005MPa | -5°C~60°C | Nylon, soft nylon, polyurethane |
| HAKH-08-02S | air | -100kpa~1MPa | 0.005MPa | -5°C~60°C | Nylon, soft nylon, polyurethane |
| HAKH-08-03S | air | -100kpa~1MPa | 0.005MPa | -5°C~60°C | Nylon, soft nylon, polyurethane |

HAKH Specification



HAKH

Size[mm]

| Models | ΦD | R | S | L | M |
|-------------|----|-------|----|------|------|
| HAKH-08-01S | Φ8 | R1/8" | 14 | 31.7 | 18.5 |
| HAKH-08-02S | Φ8 | R1/4" | 14 | 42 | 18.5 |
| HAKH-08-03S | Φ8 | R3/8" | 17 | 54.2 | 18.5 |